


sp-502 / sp-504 / sp-509

1x2 / 1x4 / 1x9 Dual Link DVI Splitters

Our Splitters sp-502 (1x2 DUAL LINK DVI) / sp-504 (1x4 DUAL LINK DVI) / sp-509 (1x9 DUAL LINK DVI) provides the most cost effective and advanced DUAL LINK DVI splitter solution on the market, by which the super high definition video can be transmitted to 2-4 or 9 different locations without losing quality.

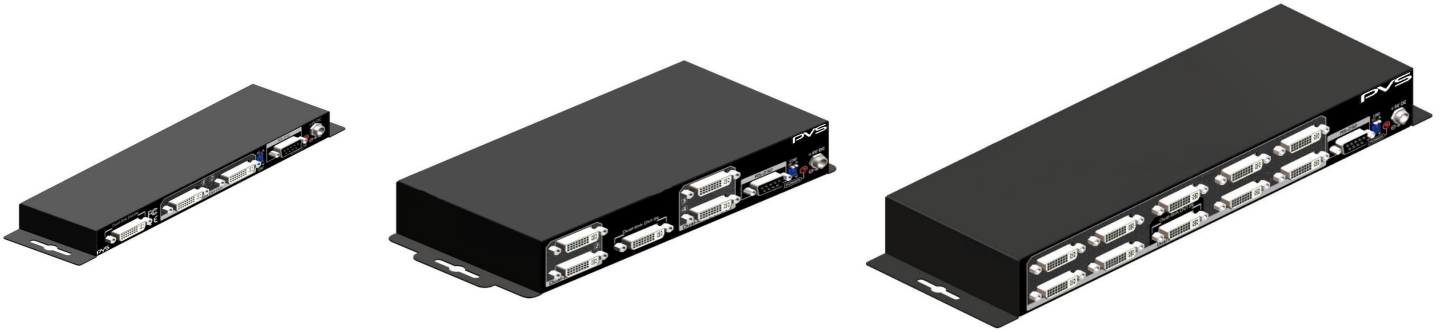

Features

- DVI 1.1 compliant
- Wide Frequency Range: up to 300MHz
- EDID learning using DIP switch
- RS-232 firmware update for expanding compatibility
- RS-232 EDID update
- Wall-mount housing design for easy installation

Technical Specifications

Role of Use: Splitter Dual Link DVI - Distributor Amplifier

Supported Input & Output: DVI

Video Bandwidth: 300 MHz

DVI connector: DVI-I 29pin female - digital only

Audio Support: No

DVI Compliance: 1.1

MECHANICAL

Dimensions (LxWxH): Desktop - sp-502 [210x57x24mm] & sp-504 [219x100x43mm] & sp-509 [291x98x43mm]

Weight: 1.5 lbs [all models]

Power Supply: 5V-4A DC

Power consumption: 15 Watts Max

Operation temperature: 0-40 C

Relative humidity: 20-90% RH

